


**6 Fiber Multi Mode Multitube Fiber Optic
Cable Part No. 1-2225406-2**



DATA SHEET

CABLE DESCRIPTION

- 1 50/125 OM4 Multimode Armored Optical Fiber cables
- 2 Designed with a Loose tube construction
- 3 Tubes are gel filled to ensure protection against moisture ingress
- 4 Designed for use in the following applications like Backbone cabling, Campus site cabling & Outdoor Ducts or Direct Burial applications
- 5 Cable contains upto 6 Fibers
- 6 Each loose tube contain 6 Optical Fibers
- 7 ECCS Armour
- 8 Central Strength - FRP Rod
- 9 HDPE Sheath

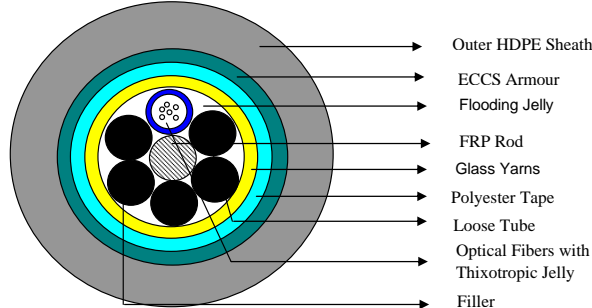

SL.No.	PARAMETER	UNIT	SPECIFICATIONS
1	TYPE OF CABLE		6F MULTITUBE ARMORED OPTICAL FIBER CABLE
2	STANDARDS		
a)	EN 50173; ISO/IEC 11801		YES
b)	ANSI/TIA-568-C.3		YES
c)	Telcordia GR-409		YES
3	FIBER		MULTIMODE MODE FIBER
a)	FIBER SIZE	um	50/125/250 (OM4)
b)	No. OF FIBERS / LOOSE TUBE	No.	6F
c)	FIBER IDENTIFICATION		
	6F		BLUE, ORANGE, GREEN, BROWN, GREY & WHITE
4	OPTICAL PARAMETERS - MM		
a)	ATTENUATION @ 850nm	dB/Km	≤ 2.7 (MAX)
b)	ATTENUATION @ 1300nm	dB/Km	≤ 0.7 (MAX)
c)	CABLED FIBER ATTENUATION @ 850 nm	dB/Km	≤ 3.0 (MAX)
d)	CABLED FIBER ATTENUATION @ 1300 nm	dB/Km	≤ 1.0 (MAX)
e)	OVERFILL BANDWIDTH		
	@ 850nm	MHz x km	≥ 3500
	@ 1300nm	MHz x km	≥ 500
f)	MAX.LINK LENGTH FOR 1 GBit/s		
	@ 850nm (1000Base-SX)	Meter	1040
	@ 1300nm (1000Base-LX)	Meter	600
g)	MAX.LINK LENGTH FOR 10 GBit/s		
	@ 850nm (10GBase-SR & SW)	Meter	550
	@ 1300nm (10GBase-LX4)	Meter	300
	By using Mode Conditioning Patch cord		
h)	CORE/MODE-FIELD	um	50
i)	CLADDING	um	125
j)	COATING	um	250
5	LOOSE TUBE / TIGHT BUFFER		LOOSE TUBE
a)	MATERIAL		PBTP
b)	No. OF LOOSE TUBES	No.	4
c)	DIAMETER	mm	3±0.2
d)	COLOUR OF LOOSE TUBE		BLUE
e)	SEQUENCE OF ELEMENTS IN CORE		BL LOOSE TUBE, BK1, BK2, BK3, BK4 & BK5 FILLERS
f)	LOOSE TUBE GEL		WATER BLOCKING GEL
g)	CORE WRAPPING		SINGLE LAYER OF POLYESTER TAPE
6	JACKETING		
a)	MATERIAL		HDPE
b)	COLOUR		BLACK
c)	NOMINAL THICKNESS	mm	2.0
d)	OVERALL DIAMETER (NOMINAL)	mm	15.5
7	STRENGTH MEMBERS		YES
a)	TYPE (Peripheral)		WATER BLOCKING E-GLASS
b)	TYPE (Central)		FRP ROD
8	ARMOURING		
a)	TYPE		ECCS TAPE
b)	MS TAPE THICKNESS		> 0.15
9	MECHANICAL PROPERTIES		
a)	MINIMUM INSTALLATION BEND RADIUS	mm	310
b)	MINIMUM SERVICE BEND RADIUS	mm	248
c)	CABLE WEIGHT (NOMINAL)	Kg/Km	215
d)	STANDARD LENGTH	Mtrs	2KM±5%
e)	TENSILE STRENGTH	N	4000
f)	MAXIMUM CRUSH RESISTANCE	N	4000
g)	OPERATING TEMPERATURE	deg C	-20 to +70
h)	TYPE OF PACKING		WOODEN DRUM
10	PRINTING DETAILS		ADC F.O CABLE 1-2225406-2 ECCS GEL LOOSE Multi TUBE 6X50/125 OM4F HDPE (ML)XXXXYY/ZZ MMMM

This document is Confidential, and is the property of ADC India Ltd. ADC India owns the copyright, and the document must not be copied or changed in any form, wholly or in part, without prior permission from ADC India. The contents of this document must not be disclosed to any other person or persons