
ADC Structured Cabling Solutions

Fibre Optic Cable-Outdoor Armoured Gel-Filled Loose Tube Cable

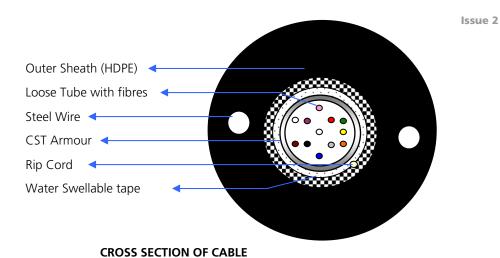

Fibre Cable Outdoor Armoured Lite 50/125 OM3 MM 12 Core

Features:

- Suitable for Inter building backbone connectivity
- Suitable for duct or direct burial applications
- Colour coded fibres in Gel filled loose tubes
- Water blocking Tape
- Corrugated Steel Tape Armouring
- Rigid Steel strength members
- Outer sheath of HDPE

Specifications

Attenuation dB/km	
850nm	
1300 nm	
Bandwidth Mhz.km	
850nm	>=1500
1300nm	>=500
Numerical Aperture	0.200 ±0.015
Core Diameter µm	50.0 ±2.0
Core non circularity %	<=6.0
Core clad concentricity error µm	<=6.0
Cladding non circularity%	<=2.0
Cladding diameter µm	
Coating diameter µm	245± 10
Type of Fibre	50/125 OM3 multi mode



www.adc.com/in • 1800 425 8232

ADC Structured Cabling Solutions

Fibre Optic Cable-Outdoor Armoured Gel-Filled Loose Tube Cable

Cable Properties

No of fibres	12
No of Loose Tubes	
Colour of Fibre blue, orange, green, brown, slate, white, red, black, yellow, vi	olet, pink & natural
Spring Steel wire diameter (2Nos) (mm)	0.9
Sheath Thickness (mm)	
Cable Diameter (mm)	9.0±0.5
Tensile Strength-installation (Newton)	2000
Operating (Newton)	1000
Minimum bending radius mm	180
Crush Resistance (Newton/100mm)	4000
Cable Weight (Kg/Km)	85±8
Operating/Installing Temperature (°C)	30 to +70
Storage Temperature (°C)	30 to +70
Packing Length (Km)	2 ±10%

Ordering Information


Description	Product No.
Fibre Cable Outdoor Armoured Lite 50/125 OM3 MM 12 Core	D012LTSUAR50UIN

*KRONE Communications Ltd. is now ADC India Communications Ltd.





10C, II Phase Peenya Industrial Area Bangalore 560 058 Sales Support: 1800 425 8232





D012LTSUAR50UIN / Issue 2 © 2010 ADC Telecommunications, Inc. All Rights Reserved.